


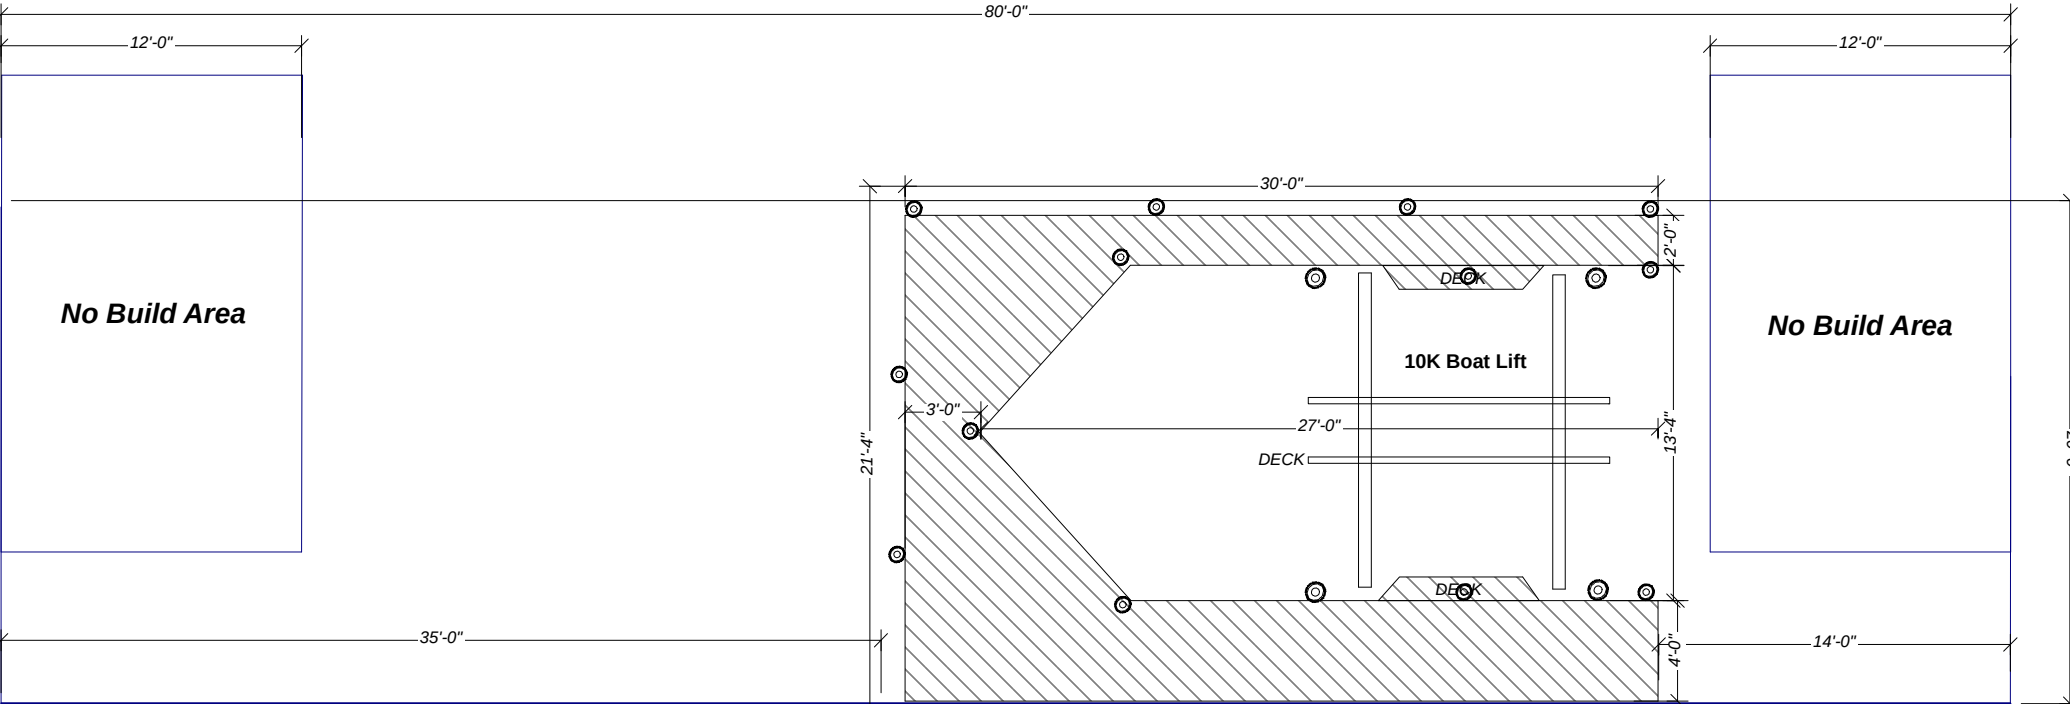

Drawing *11044 [Additional Information] Note: All dimensions are approximate. Dimensional projections into canal are measured from seawall face. Note: The direction of the decking shown on plan is to highlight the dock areas and is not the direction of the installed decking. Note: Decking is flush with seawall	80' Width   Acceptance Signature: _____	[Key] (10k) Lift (1) Ladder (13) New 8in Pilings (4) New 10in Pilings (X) Existing Pilings (X') Rope Handrail (X) Rope Handrail Hook (X') Tiki Hut (X') Umbrella Tiki (X') Canvas Canopy
	[Square Footage] Existing Square Footage: 0 Optional Square Footage: (X) Proposed Square Footage: 260 Maximum Square Footage: (X) Proposed Re-Deck Square Footage: (X) Total Square Footage: (X)	

Hawley Construction

4200 River Grove Lane
Fort Myers, FL 33905

(239) 561-8074

Estimate

DATE	ESTIMATE NO.
7/29/2026	11044

NAME / ADDRESS
Martin Hawley 1826 SW 17th Ave Cape Coral, FL 33991



ESTIMATOR		VALID UNTIL	Family Owned and Operated Since 1999	PROJECT	
		7/29/2026		1826 SW 17th Ave	
QTY	DESCRIPTION			COST	TOTAL
	PER DRAWING *11044 Decking to be 1" PVC Decking fastened with stainless steel screws to .60 CCA 2x8 R/S stringers fastened to 8" piles with stainless steel bolts.			21,120.00	21,120.00
	10K Aluminum Boat Lift US Gear Box Drive (www.boatliftus.com) with standard "V" haul bunks.			9,081.00	9,081.00
	All Boat Lifts come supplied with a standard manual switches without a weatherproof control box.				
	Optional: GEM Remote Control with Auto Stop Add: 850.00 to Total Initial : _____				
	Electric and/or Plumbing services done by others. They are not included in the estimate and are the responsibility of customer.				
	Federal, State and Local Building permits obtained by contractor - CBC1268641				
	Ladder and reflectors included per building code.				
	PVC plastic pile wrap fastened with stainless steel nails included on all new pilings.				
	Black Cone Pile Caps installed on available pilings				
	ACCEPTANCE SIGNATURE _____				
				TOTAL \$30,201.00	

All material is to be as specified. All work is to be completed in a workmanship like manner according to standard practices. Any alteration or deviation from the above specifications involving extra cost, will be executed only upon written orders and are in addition to this estimate. All agreements contingent upon permitting, strikes or equipment delays beyond our control. This proposal is subject to acceptance within 30 days and is void thereafter at our option. We warranty our work for one year. Warranty valid only if original work is not modified, and we must be notified within 30 days of occurrence of problem. This warranty does not cover damage resulting from abuse, misuse, neglect, natural or manmade occurrence. Balance to be paid in full upon completion. Hawley Construction retains ownership of any and all materials until balance is paid in full. All cost incurred as a result of non-payment shall be sustained by the customer.